


# 規格追加 赤文字表示


## THRUST NEEDLE ROLLER BEARINGS

### スラスト針状ころ軸受

■特長：1枚のスラスト保持器と2枚のワッシャで構成されており、アキシャル荷重を受けることができます。

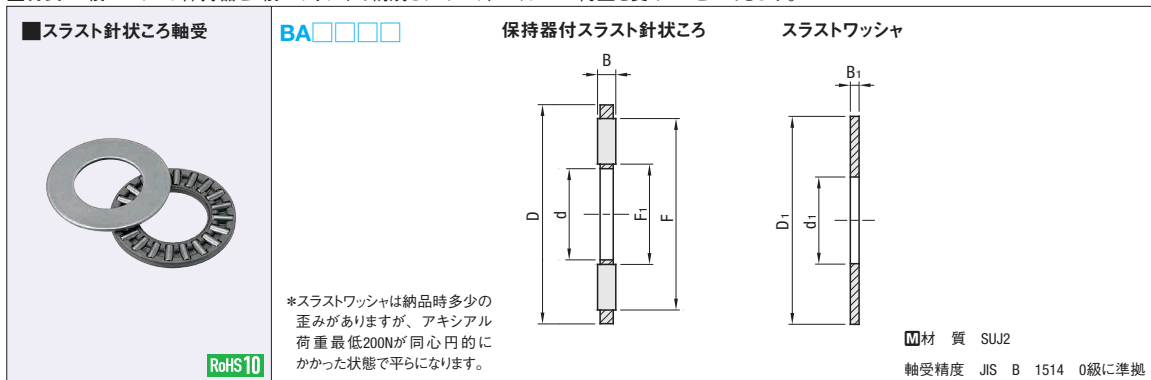

型式	保持器付スラスト針状ころ				スラストワッシャ×2				許容回転数 rpm (参考)	基本動定格荷重 Ca kN	基本静定格荷重 Coa kN	質量 (g) (参考)	標準単価			
	d 許容差	D 許容差	B 許容差	F F <sub>1</sub>	d <sub>1</sub> 許容差	D <sub>1</sub> 許容差	B <sub>1</sub> 許容差	B <sub>1</sub> 許容差								
BA0414	4		14	-0.095	13.0	5.0	4		14	-0.032	5200	4.4	8.0	2.7	540	
BA0515	5	+0.140 +0.020	15	-0.365	14.0	6.0	5		15	-0.302		4.8	9.2	2.8		
BA0619	6		19		18.0	7.0	6		19		4700	6.8	15.5	5.0	510	
BA0821	8	+0.175 +0.025	21		20.0	9.0	8		21		4500	7.8	19.4	6.0		
BA1024	10		24	-0.110 -0.440	23.0	12.0	10		24	-0.040 -0.370		9.2	25.5	9.0		
BA1226	12		26		25.0	14.0	12		26		3700	9.9	29.0		250	
BA1528	15	+0.212 +0.032	28		27.0	17.0	15		28	+0.302 +0.032		3200	11.3	36.0	10.0	
BA1730	17		30		29.0	19.0	17		30		3000	11.9	39.5	12.0		
BA2035	20		35		34.0	22.0	20		35		2500	13.1	46.5	15.0	280	
BA2542	25	+0.250 +0.004	42	-0.130 -0.520	41.0	29.0	25		42	+0.370 +0.040		2100	14.7	58.0	21.0	360
BA3047	30		47		46.0	34.0	30		47		1800	16.3	70.0	24.0		
BA3552	35		52	-0.120 -0.370	49.4	39.5	35		52		1400	17.8	81.5	28.0	530	
BA4060	40	+0.210 +0.005	60		56.2	44.2	40		60	+0.300 +0.050		1200	27.4	110.0	43.0	570
BA4565	45		65	-0.130 -0.380	62.4	50.5	45		65	-0.060 -0.520		1100	29.8	128.0	48.0	640
BA5070	50		70		67.4	55.5	50		70		1000	31.5	143.0	53.0	710	
BA5578	55		78		74.9	61.0	55		78		900	38.0	186.0	68.0	810	
BA6085	60		85	-0.140 -0.440	81.9	66.0	60		85		800	44.5	234.0	84.0	900	
BA6590	65	+0.250 +0.006	90		86.9	71.0	65		90	+0.360 +0.060		750	46.5	254.0	88.0	1,000
BA7095	70		95		91.4	75.5	70		95		750	53.5	253.0	110.0	1,400	
BA75100	75		100	-0.150 -0.450	96.4	80.5	75		100	-0.072 -0.612		500	55.0	286.0	115.0	1,800
BA80105	80		105		100.3	84.4	80		105		650	56.5	279.0	119.0	2,200	
BA85110	85	+0.292 +0.072	110	-0.170 -0.520	106.4	90.5	85		110	+0.422 +0.072		600	57.5	291.0	127.0	2,600
BA90120	90		120		116.4	96.5	90		120			70.5	390.0	163.0	3,000	

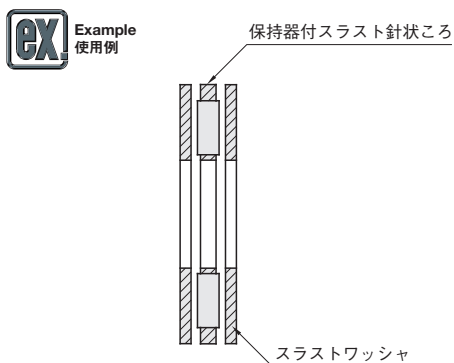

Order 注文例

型式 BA0515

Delivery 出荷日

在庫品 翌日出荷 P.133

ご希望によりPM6:00迄、当日出荷受付致します。

Price 価格

数量スライド価格 (1円未満切り捨て) P.133

数量区分	標準対応	個別対応
数量	1~14 15~30 31~100 101~	大口
値引率	基準単価 5% 10% お見積り	


表示数量超えはWOSにてご確認ください。

# 新商品

## THRUST CYLINDRICAL ROLLER BEARINGS

### スラスト円筒ころ軸受

■特長：大きな動アキシャル荷重を受ける構成の転がり軸受です。

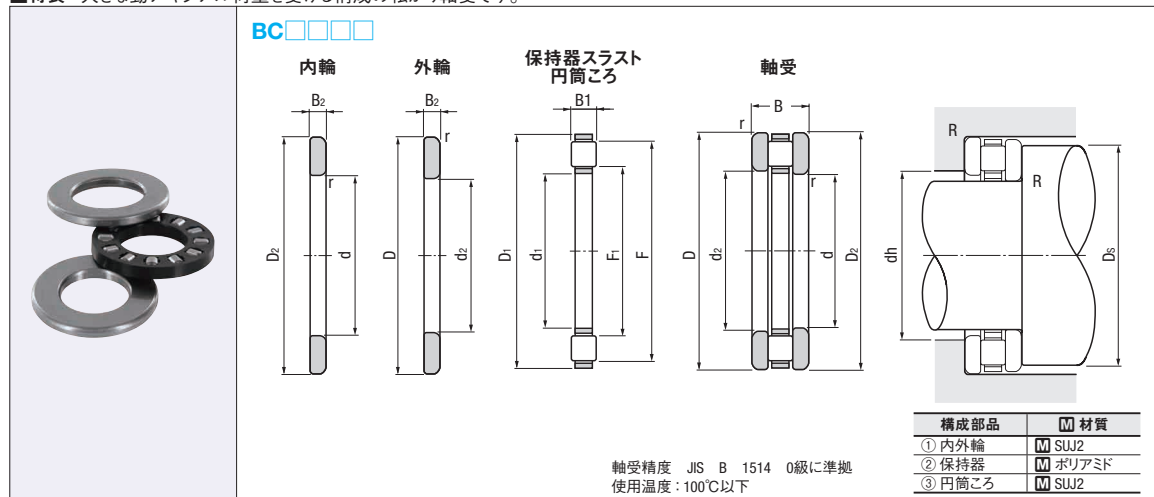

型式	内輪		外輪		保持器スラスト円筒ころ				軸受		許容回転数 rpm (参考)	基本動定格荷重 Ca kN	基本静定格荷重 Coa kN	取付関係寸法			質量 (g) (参考)	標準単価			
	d	D <sub>2</sub> 許容差	d <sub>2</sub> 許容差	D B <sub>2</sub>	d <sub>1</sub> 許容差	D <sub>1</sub> 許容差	B <sub>1</sub> 許容差	F <sub>1</sub> F	B	r (min.)				Ds (min.)	dh (max.)	R (max.)					
BC1528	15		16		28	15	+0.212 +0.032	28	-0.300 -0.630	3.5	17.2	25.0	9	0.3	2800	12.2	26.8	25	18	26	1,600
BC1730	17		18	2.75	30	17		30	-0.310 -0.700	4.5	19.2	27.0	10	0.3	2500	12.7	29.0	27	20	30	1,650
BC2035	20		21		35	20		35	-0.310 -0.710	5.0	22.4	32.3	11	0.6	2100	20.2	46.5	32	23	40	1,700
BC2542	25		26	3.00	42	25	+0.250 +0.040	42	-0.320 -0.710	5.0	27.6	38.7	11	0.6	1800	27.3	68.0	39	28	60	1,900
BC3047	30		32	4.25	47	30		47	-0.340 -0.800	7.5	33.1	43.9	16	1.0	1500	27.8	72.5	44	33	70	2,300
BC3052	30		32	4.25	47	30		47	-0.340 -0.800	7.5	32.8	49.0	16	1.0	1500	53.0	129.0	48	33	140	3,500
BC3552	35		37	3.50	52	35		52	-0.340 -0.800	7.5	38.0	48.9	12	1.0	1400	31.0	87.0	49	38	90	2,700
BC3562	35		37	5.25	62	35		62	-0.340 -0.800	7.5	39.8	56.0	18	1.0	1200	54.5	139.0	56	41	235	4,000
BC4060	40		42	6.00	60	40		60	-0.360 -0.820	9.0	43.2	56.4	13	0.6	1100	43.0	121.0	56	44	135	2,900
BC4068	40		42	5.00	68	40	+0.300 +0.050	68	-0.360 -0.820	9.0	43.7	62.9	19	1.0	1100	74.5	190.0	63	44	265	4,400
BC4565	45		47	4.00	65	45		65	-0.340 -0.800	6.0	48.4	61.6	14	0.6	1100	45.5	135.0	61	49	150	3,200
BC4573	45		47	5.50	73	45		73	-0.340 -0.800	6.0	48.8	68.0	20	1.0	1000	82.0	222.0	68	49	310	4,500
BC5070	50		52	4.00	70	50		70	-0.360 -0.820	6.0	53.2	66.4	14	0.6	1000	48.5	150.0	66	54	165	3,400
BC5078	50	-0.2 -0.5	52	+0.5 +0.2	78	50		78	-0.360 -0.820	9.0	53.7	73.1	22	1.0	950	85.0	238.0	73	54	385	5,300
BC5578	55		57	5.00	78	55		78	-0.360 -0.820	6.0	57.8	75.2	16	0.6	900	62.5	215.0	75	58	250	4,200
BC5590	55		57	7.00	90	55		90	-0.360 -0.820	11.0	60.1	83.4	25	1.0	830	121.0	340.0	83	61	610	6,500
BC6085	60		62	4.75	85	60		85	-0.380 -0.920	7.5	63.7	80.1	17	1.0	830	69.0	215.0	80	65	285	4,600
BC6095	60		62	7.50	95	60		95	-0.380 -0.920	11.0	64.9	88.4	26	1.0	780	126.0	365.0	88	66	660	6,900
BC6590	65		67	5.25	90	65		90	-0.380 -0.920	7.5	68.8	85.2	18	1.0	780	73.0	236.0	85	70	340	7,800
BC65100	65		67	8.00	100	65	+0.360 +0.060	100	-0.380 -0.920	11.0	69.9	93.3	27	1.0	730	130.0	385.0	93	71	775	5,300
BC7095	70		72	5.25	95	70		95	-0.380 -0.920	7.5	73.7	90.1	18	1.0	730	76.5	257.0	90	74	365	8,200
BC70105	70		72	8.00	105	70		105	-0.410 -0.950	11.0	75.0	98.4	27	1.0	680	134.0	410.0	98	76	815	5,600
BC75100	75		77	5.75	100	75		100	-0.380 -0.920	7.5	78.8	95.1	19	1.0	680	78.0	268.0	95	80	425	6,600
BC75110	75		77	8.50	110	75		110	-0.380 -0.920	11.0	80.1	103.7	27	1.0	650	138.0	435.0	103	81	860	9,400
BC80105	80		82	5.75	105	80		105	-0.410 -0.950	7.5	83.7	100.1	19	1.0	650	79.5	279.0	100	85	445	7,200
BC80115	80		82	8.50	115	80		115	-0.410 -0.950	11.0	84.8	108.4	28	1.0	630	143.0	460.0	106	86	950	11,000
BC85110	85		87	5.75	110	85	+0.422 +0.072	110	-0.410 -0.950	7.5	88.7	105.3	19	1.0	630	83.0	300.0	105	89	475	8,000

Order 注文例

型式 BC1528

Delivery 出荷日

在庫品 翌日出荷 P.133

ご希望によりPM6:00迄、当日出荷受付致します。

Price 価格

数量スライド価格 (1円未満切り捨て) P.133

数量区分	標準対応	個別対応
数量	1~9 10~20 21~50 51~	大口
値引率	基準単価 5% 10% お見積り	

表示数量超えはWOSにてご確認ください。

14 ベアリングホルダ