



規格追加
赤文字表示

FOOT BASES
フットベース

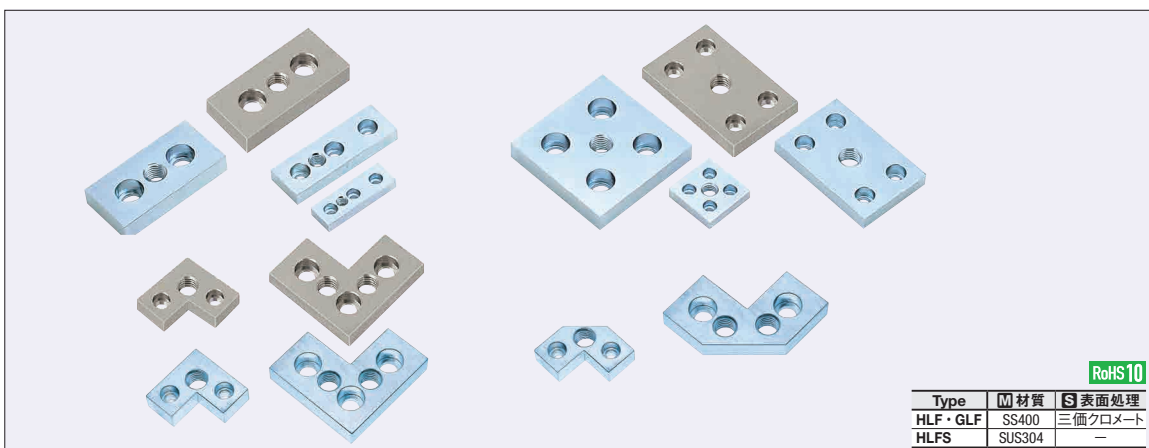

RoHS10

Type	材質	S 表面処理
HLF・GLF	SS400	三価クロメート
HLFS	SUS304	—

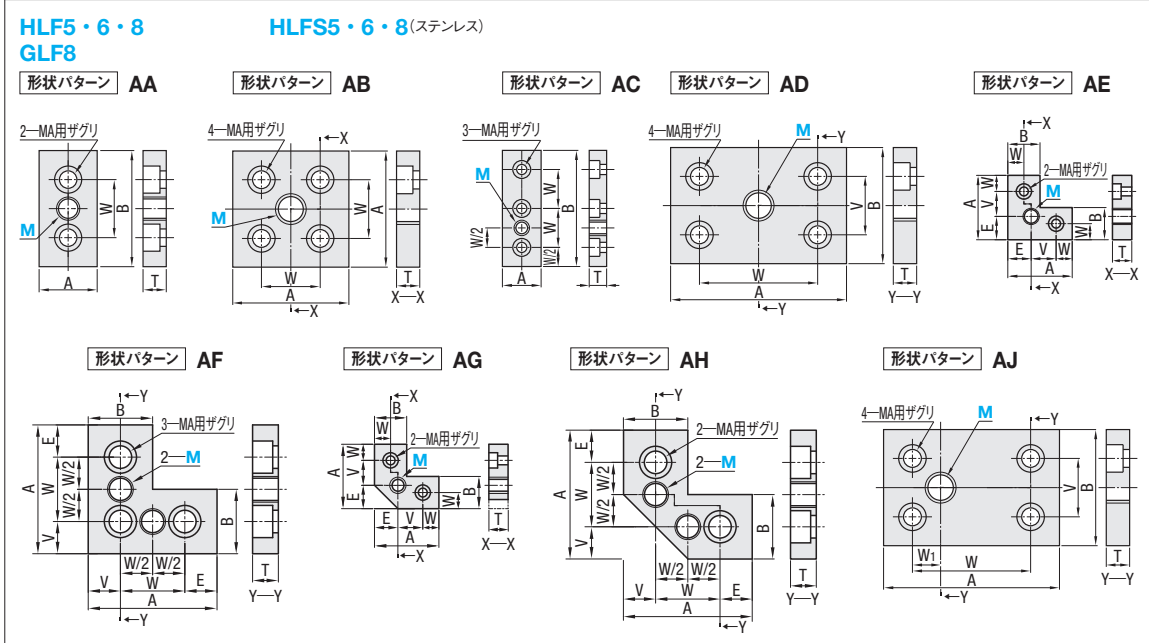

型式	フレーム	アジャスタパッド M(並目)	形状パターン	A	B	W	W1	V	E	T	ザグリ MA	質量kg		対応ボルト		HLF(GLF)		HLFS			
												HLF(GLF)		ボルト		個数		半基準単価		半標準単価	
												HLF	GLF	M5-15	M8-25	1~8コ	9~50	1~8コ	9~50	1~8コ	9~50
HLF5 (スチール)	2040	8	AA	20	40	20				9	5	0.05	M5-15	2	345	328	660	630			
	2550	8	AA	25	50	25				12	8	0.07	M8-25	2	460	437	780	730			
	2060	8	AC	20	60	20						0.06			465	442	890	840			
	2080	8	AA	20	80	60				9		0.1	M5-15	4	560	532	870	820			
	4040	8 10 12	AB	40		20						0.09		4	610	580	880	830			
	404020	12	AE	40	20	10		15.5	14.5	12	5	0.08	M5-20	2	680	646					
	404020A	12	AG	40	20	10						0.06		2	730	694					
	4060	12	AJ	60	40	40	10					0.14	M5-15	4	745	708	990	940			
	4080	12	AD	80	40	60				20	9	0.21		4	825	784	1,140	1,080			
	HLF6 (スチール)	3060	10 12 16	AA	30	60	30						0.13		2	530	504	1,010	960		
3090		12	AC	30	90							0.24		2	640	608	1,240	1,170			
30120		12	AA	30	120	90						0.31		2	680	646	1,440	1,360			
5050		10 12	AB	50		20						0.28		4	755	717	1,330	1,260			
50100		10 12	AD	100	50	70				20		0.42		4	850	808	1,770	1,680			
100100		16 20	AB	100							12	0.9	M8-25	4	1,780	1,691	2,700	2,560			
6060		10 12 16	AB	60								0.28		4	805	765	1,510	1,430			
606030		12	AF	60	30	30		15	15			0.18		3	880	836					
606030A		12	AH	60	30							0.16		2	930	884					
6090		16	AD	90	60	60				30		0.47		4	910	865	1,840	1,740			
60120		16	AD	120	60	90						0.63		4	1,075	1,021	2,250	2,140			
HLF8 (スチール)		4080*	12 16	AA	40	80	40						0.31	M12-30	2	675	641	1,570	1,490		
	40160	16	AA	40	160	120						0.79		2	790	751	2,340	2,220			
	4590*	16	AA	45	90	45						0.427	M12-20	4	775	736	1,730	1,640			
	45180	16 20	AA	45	180	135						0.94		4	820	779	2,840	2,700			
	50100*	16	AA	50	100	50						0.55		4	850	808					
	8080	12 16 20	AB	80							16	0.73	M8-30	4	1,375	1,306	2,410	2,280			
	808040	16	AF	80	40	40					19	0.95	M8-30	4	2,020	1,919	5,670	5,386			
	808040A	16	AH	80	40					20	20	0.38	M12-30	3	1,440	1,368					
	80160	16 20	AD	160	80	120					16	0.35		2	1,520	1,444					
	9090	16 20	AB	90		45					8	1.56	M8-30	4	1,490	1,416	4,110	3,900			
	909045	16	AF	90	45	45					8	0.95	M8-30	4	1,435	1,363	2,820	2,680			
	909045A	16	AH	90	45					22.5	22.5	1.21	M8-30	4	2,380	2,261	6,430	6,108			
	90180	16 20	AD	180	90	135				45		1.99	M8-30	4	1,580	1,501	4,880	4,630			
	GLF8 (スチール)	9090	20	AB	90		45				16	12	0.95	M12-25	4	1,430	1,360				
		24 30	AB	90						19	12	1.21	M12-30	4	2,400	2,280					
100100		20	AB	100		50				16	12	1.12	M12-20	4	1,780	1,690					
		24 30	AB	100						19	12	1.49	M12-30	4	2,920	2,774					

規格表で*の付いたフットベースは、高剛性アルミフレームにも使用できます。

取付用ボルトはついていません。

Order 注文例 型式 — M

HLF6 — 3060 — 10

Delivery 出荷日 2 日日出荷

ご注文締切

ストーク T 当日出荷 無料 正午迄 P.134

Price 価格

数量区分	標準対応	個別対応
数量	小口 1~50	大口 51~
出荷日	通常	お見積り

表示数量超えはWOSにてご確認ください。

41
元
へ
フ
ィ
タ
タ