6,440


7,050

7,600

8,220

8.930



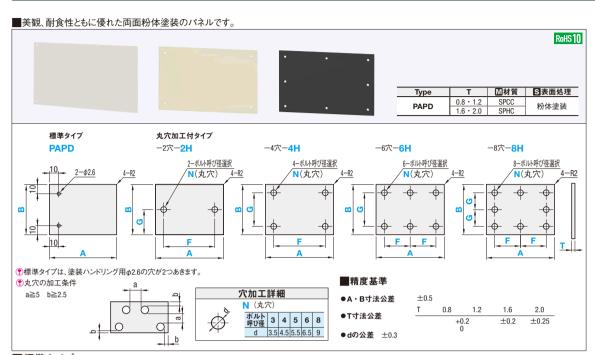

■標準タイプ					
型式	指定1m	nm単位			
Type	A B		T	塗装色	
PAPD	200~1200	200~1000	0.8 1.2 1.6 2.0	U2570B U2280D U2290D U2580B U2785B U2290B UN95 UN10	

■穴加工付タイ	プ

型式		指定1n	nm単位	選択	指定1mm単位		呼び径選択	選択
Type	呼び	Α	В	Т	F	G	N	塗装色
PAPD	2H 4H 6H 8H	200~1200	200~1000	0.8 1.2 1.6 2.0	9~1191 (2H・4Hタイプ) 9~595 (6H・8Hタイプ)	5~995 (2Hタイプ) 9~991 (4H・6Hタイプ) 9~495 (8Hタイプ)	3 4 5 6 8	U2570B U2280D U2290D U2580B U2785B U2290B UN95 UN10

## ■塗装色の種類(塗装面のツヤは、UN95を除きすべて半ツヤになります。UN95のみ全ツヤです。):日本塗料工業会2007D版No.で指定

塗装色							
	<b>U2570B</b> 近似マンセル No. 5Y7/1						
	<b>U2785B</b> 近似マンセル						

■標準タイプ

型式

No. 7.5Y8.5/1

U2280D 近似マンセル No. 2.5Y8/2

近似マンセル

No. 2.5Y9/1

- | A | - | B | - | T | - | 塗装色

近似マンセル No. 2.5Y9/2

近似マンセル No. 5Y8/1

近似マンセル No. N9.5





No. N1

近似マンセル



**PAPD** - 600 - 400 - 0.8 - U2280D ■穴加工付タイプ

|-| A |-| B |-| T |-| F |-| G |-|ボルト呼び径|-| 塗装色 PAPD4H - 800 - 600 - 1.2 - F700 - G500 -

Price 価格

	■数量スライド価格(®1円未満切り捨て) P.133						
Ī	数量区分	標準対応 個別対応					
	效里区ガ	小口	大	大口			
	数量	1~30	31~49	50~100	101~		
Ī	値引率	基準単価	4%	12%	お見積り		
Ī	出荷日	通常	+3日	+5日	わ兄傾り		

■穴加工料金 600 ・表示数量超えはWOSにてご確認ください。

200 400 (例) 型式 - A - B - T - F - G - ボル呼び径 - 塗装色 (標準タイプ単価)+(穴加工料金)=穴加工タイプ単価 + 400円 = 2470円

						2,070 円	+ 40	0円 =	2,470 円	
■標準タイ	ブ単価									
			¥基準単価							
型式	T	A				E	3			
			200~300	301~400	401~500	501~600	601~700	701~800	801~900	901~1000
		200~ 300	1,170	1,280	1,440	1,600	1,700	1,990	2,070	2,330
		301~ 400	1,280	1,470	1,650	1,720	2,010	2,110	2,370	2,530
		401~ 500	1,440	1,650	1,730	2,040	2,130	2,410	2,570	2,700
		501~ 600	1,600	1,720	2,040	2,130	2,420	2,600	2,730	2,950
	0.8	601~ 700	1,700	2,010	2,130	2,420	2,600	2,750	2,980	3,190
	0.8	701~ 800	1,990	2,110	2,410	2,600	2,750	2,990	3,210	3,430
		801~ 900	2,070	2,370	2,570	2,730	2,980	3,210	3,440	3,700
		901~1000	2,330	2,530	2,700	2,950	3,190	3,430	3,700	3,920
		1001~1100	2,480	2,650	2,900	3,150	3,400	3,680	3,900	4,160
		1101~1200	2,600	2,840	3,100	3,360	3,640	3,880	4,150	4,480
		200~ 300	1,470	1,610	1,800	2,000	2,130	2,490	2,590	2,920
		301~ 400	1,610	1,840	2,070	2,160	2,520	2,640	2,970	3,170
		401~ 500	1,800	2,070	2,170	2,550	2,670	3,020	3,220	3,380
		501~ 600	2,000	2,160	2,550	2,670	3,030	3,250	3,420	3,690
	4.0	601~ 700	2,130	2,520	2,670	3,030	3,260	3,440	3,730	3,990
	1.2	701~ 800	2,490	2,640	3,020	3,250	3,440	3,740	4,020	4,290
		801~ 900	2,590	2,970	3,220	3,420	3,730	4,020	4,300	4,630
		901~1000	2,920	3,170	3,380	3,690	3,990	4,290	4,630	4,900
		1001~1100	3,100	3,320	3,630	3,940	4,260	4,600	4,880	5,210
DADD		1101~1200	3,250	3,560	3,880	4,200	4,550	4,850	5,190	5,600
PAPD		200~ 300	1,760	1,930	2,160	2,400	2,550	2,980	3,100	3,500
		301~ 400	1,930	2,200	2,480	2,590	3,020	3,160	3,560	3,800
		401~ 500	2,160	2,480	2,600	3,060	3,200	3,620	3,860	4,050
		501~ 600	2,400	2,590	3,060	3,200	3,630	3,900	4,100	4,420
	1.6	601~ 700	2,550	3,020	3,200	3,630	3,910	4,120	4,470	4,780
	1.0	701~ 800	2,980	3,160	3,620	3,900	4,120	4,480	4,820	5,140
		801~ 900	3,100	3,560	3,860	4,100	4,470	4,820	5,160	5,550
		901~1000	3,500	3,800	4,050	4,420	4,780	5,140	5,550	5,880
		1001~1100	3,720	3,980	4,350	4,720	5,110	5,520	5,850	6,250
		1101~1200	3,900	4,270	4,650	5,040	5,460	5,820	6,220	6,720
		200~ 300	2,130	2,290	2,490	2,690	2,820	3,320	3,490	3,950
		301~ 400	2,290	2,520	2,730	2,910	3,430	3,630	4,130	4,440
		401~ 500	2,490	2,730	2,940	3,490	3,720	4,240	4,580	4,860
		501~ 600	2,690	2,910	3,490	3,750	4,290	4,660	4,970	5,400
	i	004								

4,240

4,580

4,860

5,260

4,660

4,970

5,400

5,800

5,030

5,480

5,910

6,360

6.830

5,510

5,970

6,440

6,970

7,450

5,970

6,470







3,490

3,950

4,240

4.470

4,130

4,700

5.060

4,440

	丸穴を左端面より指定	丸穴を下端面より指定				
Alterations	XC F A	B S F A				
Code	XC	YC				
Spec.	〈丸穴の加工条件〉 XC=指定1mm単位 ①5≤XC≦1188 ①(2H・4Hタイプ) d/2+2.5≤XC≦A-F-d/2-2.5 ①(6H・8H タイプ) d/2+2.5≤XC≦A-2F-d/2-2.5	(丸穴の加工条件) YC=指定1mm単位 ①5≤YC≤986 ②(4H・6H タイプ) d/2+2.5≦YC≤B-G-d/2-2.5 ③(8H タイプ) d/2+2.5≦YC≤B-2G-d/2-2.5 ⊗2Hタイプは適用不可				
	⊗標準タイプは適用不可	≪標準タイプは適用不可				
¥/1Code	400	400				