

位置決め付ロックブロック


一定尺タイプ

—ブレンタイプ—



RoHS10



A=13~23



A=28~78



●インロー部の強度計算 P.1194


型式	材質	硬度
LBCSK	SKS3	53~56HRC
LBCMK	HPM2T相当	37~41HRC

—油溝付タイプ—



RoHS10



A=15~23



A=28~78



●油溝部拡大図

●インロー部の強度計算 P.1194


型式	材質	硬度
LBCSM	SKS3	53~56HRC

—無給油(特殊固体潤滑剤)タイプ—



RoHS10



A=15~23



A=28~78



●インロー部の強度計算 P.1194

型式	材質	硬度
LBCSZ	SKS3	53~56HRC

■ブレンタイプ

a	l	l1	d1	d2	t	型式		T	A								G°			
						Type	L		13	15	18	23	28	33	38	48	15	17	20	22
6	6	13	9.5	5.5	6	—ブレンタイプ— LBCSK (SKS3) LBCMK (HPM2T相当)	20	10	13	15	18	23	28	33	38	48	17	20	22	
								15	15	18	23	28	33	38	48	58	15	17	20	22
								20	23	28	33	38	48	58	17	20	22			
7	10	17	11.5	6.5	7	25	10	23	28	33	38	48	58	17	20	22				
							15	18	23	28	33	38	48	58	68	78	15	17	20	22
							20	33	38	48	58	68	78	15	17	20	22			
8	13	21	14	9	9	30	25	33	38	48	58	68	78	15	17	20	22			
							25	33	38	48	58	68	78	15	17	20	22			
							30	33	38	48	58	68	78	15	17	20	22			

■油溝付タイプ・無給油タイプ

a	l	l1	d1	d2	t	型式		T	A								G°		
						Type	L		15	18	23	28	33	38	48	15	17	20	22
6	6	13	9.5	5.5	6	—油溝付タイプ— LBCSM (SKS3)	20	15	15	18	23	28	33	38	48	15	17	20	22
								20	15	17	15	17							
								25	28	33	38	48	58	68	78	15	17	20	22
7	10	17	11	6.5	7	—無給油タイプ— LBCSZ (SKS3)	25	15	28	33	38	48	58	68	78	15	17	20	22
								20	20	22									
								30	33	38	48	58	68	78	15	17	20	22	
8	13	21	14	9	9	30	25	33	38	48	58	68	78	15	17	20	22		
							25	33	38	48	58	68	78	15	17	20	22		
							30	33	38	48	58	68	78	15	17	20	22		



Order 注文例

型式	T	A	G
LBCSK30	25	A58	G15
LBCSZ30	25	A58	G20



Delivery 出荷日

●LBCSK (T=15~30) 3 日日出荷 ストック A


(T=10) 3 日日出荷

⊗ T=10は緊急出荷サービス(ストック)不可

●LBCSM 5 日日出荷



Example 使用例

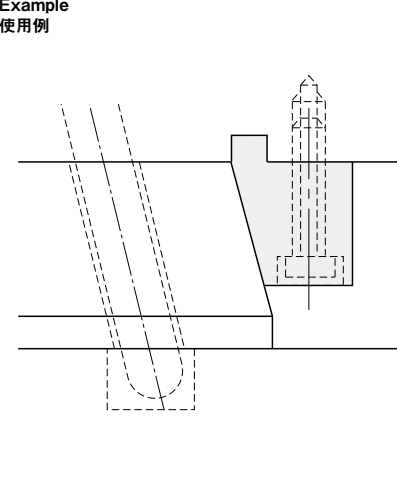

ファンキユラブル・
ロックンブロック