



	l	м	型式		_		E	G°	
а			Type	L		A	指定1mm単位	指定1°単位	
7	7	6		15	20		10~13	5~33	
					25	15 18 23 28 33 38 48	10~15	5~33	
					30		10~20	5~33	
					35	28 33 38 48 58	10~25	5~28	
					40	26 33 36 46 36	10~30	5~22	
8	9	8	LBMS (SKS3)	20	30	33 38 48 58	10~20	5~33	
					35	33 36 46 36	10~25	5~33	
					40	33 38 48 58 68 78	10~30	5~30	
					50	33 36 46 36 66 76	12~40	5~24	
	12	10	(HPM2T相当)	25	35	38 48 58 68 78	12~25	5~33	
10			(III WIZ11 ==)		40	30 40 30 00 70	12~30	5~33	
					50	48 58 68 78	12~40	5~30	
12	14			30	40		12~30	5~33	
		12			50	78 88 98	12~40	5~33	
					60		12~50	5~30	










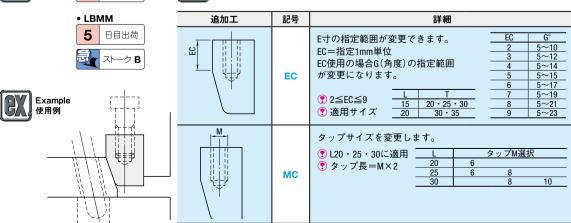

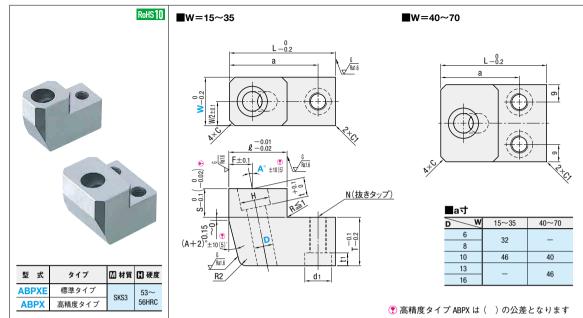

	D н7		н	t	ボ. dt	ルト: L t	——891寸 ホ ハ	・ト 抜きタッ N	プ	L	Т	F	l	S	С	型 式 Type I		D	w w		A° (選択)
	8	+0.015 0	13	5	11	11 6.5 M6		M8		40	10	10	20	10	0 3	ABPXE		8	15	20 25	15 18 20
	■ 高精度タイプ																				
	D H7		н	t	ボルト穴 d ₁ t ₁ 取付ボルト		抜きタップ N			F	l	s	С	1	型式 Type [w		A [°] (選択)		
	6	+0.012 +0.015 0	11	5					40	10	10	20	10	3			6	20			10
	8		13	э	11	6.5	M6	M 8								ABPX 8 10 13		15	20	25	15
	10		16						55		12	30	15	5	Α			25	30		
	10		10	10	14 8.6	0.6	M8	M10	50	0 25								40	45		18
	13	+0.018	19			0.0	IVIO	IVITU	55		15	35						45	50	55	20







ABPXE 日目出荷



ABPX 5 日目出荷



●抜きタップを利用してプレート側か ら取り付けることもできます。 その際は、抜きタップサイズがその まま取付ボルトサイズとなります。

