
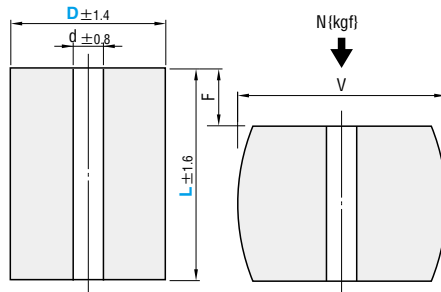


URETHANES FOR HIGH DEFLECTION 高タワミ用発泡ウレタン

LOW REPULSION URETHANES 低反発ウレタン



PA




☎ 製品概要 P.1633
 📊 荷重グラフ P.1635
 📌 高タワミ用発泡ウレタンは紫外線(日光を含む)を受けると変色しますが、使用上問題ありません。

F=L×20%		F=L×30%		F=L×40%		V	d	型式
F mm	荷重 N (kgf)	F mm	荷重 N (kgf)	F mm	荷重 N (kgf)			
6.0	981	9.0	1177	12.0	1471	36.0	14	PA 30 - 30
8.0	{100}	12.0	{120}	16.0	{150}			PA 40 - 40
8.0	1961	12.0	2452	16.0	3040			PA 40 - 40
10.0	{200}	15.0	{250}	20.0	{310}	48.0	14	PA 50 - 40
12.0	3481	15.0	4413	20.0	5541			PA 50 - 40
12.0	{355}	18.0	{450}	24.0	{565}			PA 50 - 40
16.0	4609	18.0	5737	24.0	7257	72.0	14	PA 60 - 50
16.0	{470}	24.0	{585}	32.0	{740}			PA 60 - 50
20.0	8532	24.0	10787	32.0	13729			PA 60 - 50
26.0	13925	30.0	17652	40.0	21771	96.0	14	PA 80 - 60
24.0	{1420}	36.0	{1800}	48.0	{2220}			PA 80 - 60
32.0	19907	36.0	24909	48.0	30793			PA 80 - 60
16.0	4609	18.0	5737	24.0	7257	120.0	22	PA 100 - 80
16.0	{470}	24.0	{585}	32.0	{740}			PA 100 - 80
20.0	8532	24.0	10787	32.0	13729			PA 100 - 80
26.0	13925	30.0	17652	40.0	21771	144.0	22	PA 120 - 80
24.0	{2030}	36.0	{2540}	48.0	{3140}			PA 120 - 80
32.0	29907	36.0	39909	48.0	50793			PA 120 - 80


•荷重 (kgf) = 荷重N×0.101972

☎ Order 注文例 **型式 PA 50-50**

🚚 Delivery 出荷日 **在庫品**



AN

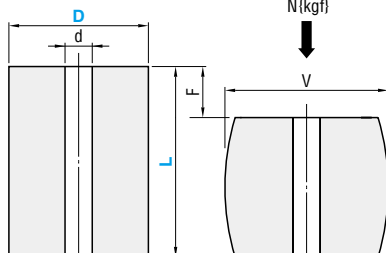

D	D T	d T	L T
20	±0.2	±0.2	±0.3
25			
30			
40	±0.3	±0.2	±0.5
50			
60			


☎ 製品概要 P.1633
 📊 荷重グラフ P.1635
 📌 硬度 ショアA70

F=L×15%		F=L×20%		F=L×25%		V	d	型式
F mm	荷重 N (kgf)	F mm	荷重 N (kgf)	F mm	荷重 N (kgf)			
3.8	343	5.0	451	6.3	617	24	8.5	AN 20-25
4.5	{35}	6.0	{46}	7.5	{63}			AN 20-25
5.3	1961	7.0	2452	8.8	3040			AN 20-25
6.0	3481	8.0	4413	10.0	5541	30	11	AN 25-25
6.0	{48}	8.0	{70}	8.8	{93}			AN 25-25
6.8	4609	9.0	5737	11.3	7257			AN 25-25
7.5	8532	10.0	10787	12.5	13729	37	14	AN 30-30
4.5	666	6.0	941	7.5	1245			AN 30-30
5.3	{68}	7.0	{96}	8.8	{127}			AN 30-30
6.0	1343	8.0	1914	10.0	2549	48	14	AN 40-40
6.0	{137}	8.0	{195}	10.0	{260}			AN 40-40
6.8	1961	9.0	2452	11.3	3040			AN 40-40
7.5	3481	10.0	4413	12.5	5541	59	14	AN 50-50
7.5	{212}	12.0	{304}	15.0	{410}			AN 50-50
8.3	4609	13.0	5737	16.0	7257			AN 50-50
9.0	8532	14.0	10787	17.0	13729	71	14	AN 60-50
7.5	3089	10.0	4481	12.5	5962			AN 60-50
9.0	{315}	12.0	{457}	15.0	{608}			AN 60-50


•荷重 (kgf) = 荷重N×0.101972

☎ Order 注文例 **型式 AN 25-40**

🚚 Delivery 出荷日 **在庫品**



PLA

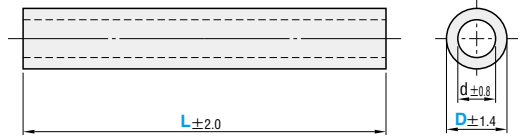


☎ 製品概要 P.1633
 📌 高タワミ用発泡ウレタンは紫外線(日光を含む)を受けると変色しますが、使用上問題ありません。

d	型式		
	Type	D	L
14	PLA	30	200
	PLA	40	200
	PLA	50	200
	PLA	60	200
22	PLA	80	200
	PLA	100	200
	PLA	120	200


☎ Order 注文例 **型式 PLA 80-200**

🚚 Delivery 出荷日 **在庫品**


全長ロングタイプ
全長指定タイプ



LAN ANX (全長ロングタイプ)
LAN ANX (全長指定タイプ)



CNN CNX (全長ロングタイプ)
CNN CNX (全長指定タイプ)



D	D T	d T	L T
20	±0.2	±0.2	±0.3
25			
30			
40	±0.3	±0.2	±0.5
50			
60			

☎ 製品概要 P.1633
 📌 硬度 ショアA70

d	型式	
	Type	D - L
8.5	LAN	20-200
11		25-200
14	LAN	30-200
		40-300
	CNN	50-300
		60-300

d	型式	D	L 指定1mm単位
			20
25			
30			
40			
50			
60			

☎ Order 注文例 **型式 LAN ANX 60-300**

🚚 Delivery 出荷日 **在庫品**

☎ 製品概要 **3** 日目出荷 **在庫品**

📌 硬度 ショアA70